




IJK BEARING COMPANY

25,4 mm x 50,292 mm x 14,732 mm ZVL K-L44643/K-L44610/K-L44600LA tapered roller bearings

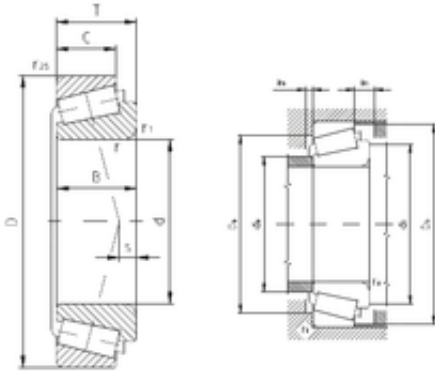

Bearing No. K-L44643/K-L44610/K-L44600LA

K-L44643/K-L44610/K-L44600LA Bearing 2D drawings and 3D CAD models

Size	25.4x50.292x14.224 mm
Bore Diameter	25,4 mm
Outer Diameter	50,292 mm
Width	14,224 mm
d	25,4 mm
D	50,292 mm
T	14,224 mm
B	14,732 mm
C	10,668 mm
r min.	1,3 mm
r1 min.	1,3 mm
r2 min.	1,3 mm
S	3,3 mm
da max	33 mm
Da min	43,5 mm
Da max.	43,5 mm
db min	32 mm
ra max.	1 mm
rb max.	1 mm
Weight	0,13 Kg
Basic dynamic load rating (C)	27,8 kN
Basic static load rating (C0)	30 kN
(Grease) Lubrication Speed	7 500 r/min
(Oil) Lubrication Speed	10 000 r/min



IJK BEARING COMPANY

Calculation factor (e)	0,37
Calculation factor (Y)	1,6